


12/20 kV or 12,7/22 kV XLPE insulated, longitudinally sealed, single core cables with copper conductor

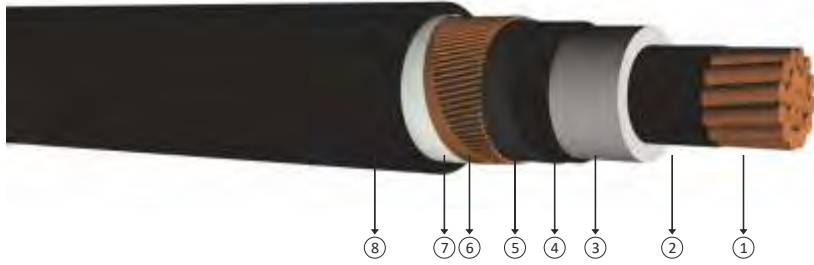

Code: N2XS(F)2Y, CU/XLPE/WBT/CWS/WBT/PE

Standards: IEC 60502-2, BS 7870-4.10

Technical Data

Max. operating temperature : 90°C
 Max. short circuit temperature : 250°C (max. 5 sec.)
 Rated voltage : 12/20 kV
 12,7/22 kV
 Min. bending radius : 15 x D
 D : Cable outer diameter

Application

These are cables with low dielectric losses used in energy networks with sudden load changes. Laid in residential or industrial areas, underground or in ducts. Swellable tape prevents cable damage by stopping water or moisture if water ingress to the cable.

Construction

- 1 Stranded copper conductors
- 2 Inner semi conductive layer
- 3 XLPE insulation
- 4 Outer semi conductive layer
- 5 Semi conductive swelling tape
- 6 Copper screen
- 7 Swellable tape
- 8 PE outer sheath

DIMENSION AND WEIGHTS				ELECTRICAL PROPERTIES									
Nominal Cross Section	Overall Diameter (approx)	Net Weight (approx)	Delivery Length	DC Conductor Resistance at 20°C (Max)	DC Conductor Resistance at 90°C (Max)	Operation Inductance (approx)		Operation Capacitance (approx)	Current Carrying Capacity (A)				
mm ²	mm	kg/km	m	Ω/km	Ω/km	*** mH/km	** mH/km	μF/km	In ground at 20°C		In air at 30°C		
									***	**	***	**	
1x35/16	30,0	900	1000	0,524	0,6707	0,676	0,436	0,157	213	189	233	199	
1x50/16	31,0	1100	1000	0,387	0,4954	0,650	0,416	0,174	250	223	279	238	
1x70/16	33,0	1300	1000	0,268	0,3430	0,619	0,394	0,197	304	273	347	296	
1x95/16	34,5	1600	1000	0,193	0,2470	0,595	0,377	0,218	361	325	420	358	
1x120/16	36,5	1850	1000	0,153	0,1958	0,576	0,365	0,238	407	368	483	412	
1x150/25	38,0	2250	1000	0,124	0,1587	0,559	0,353	0,258	445	410	540	466	
1x185/25	40,0	2650	1000	0,0991	0,1268	0,543	0,343	0,278	498	463	614	534	
1x240/25	42,5	3200	1000	0,0754	0,0965	0,523	0,330	0,308	569	534	718	627	
1x300/25	44,5	3800	1000	0,0601	0,0769	0,506	0,321	0,336	633	601	813	715	
1x400/35	48,0	4900	1000	0,0470	0,0602	0,485	0,309	0,377	686	674	904	819	
1x500/35	51,0	5900	500	0,0366	0,0468	0,469	0,300	0,413	756	750	1011	927	
1x630/35	55,0	7150	500	0,0283	0,0362	0,452	0,292	0,455	842	836	1128	1041	

Note : Current carrying capacities are valid under the following conditions;
 In ground : 20°C, 70 cm depth of lay, soil-thermal resistivity 1 K.m/W, load factor 0,7
 In air : 30°C, load factor 1,0
 *** : Flat formation, gap between cables; in air = 1 x Cable outer diameter, in ground = 7 cm
 ** : Trefoil formation
 Number of system : 1